GEI Process

153. Reusable Hose Connectors

Function: Reusable hose connectors are used as alternative to crimped hose connectors. They can be dismantled and reused as end connectors.

Features:
- Reusable
- Suitable for silicone and silicone braided hose.*
- Ease to dismantle and refix
- Autoclavable
- Sterilzing temperature: 150 °C
- Surface finish: Internal Ra< 0.5 µ, Electropolished
  External: Smooth polished.
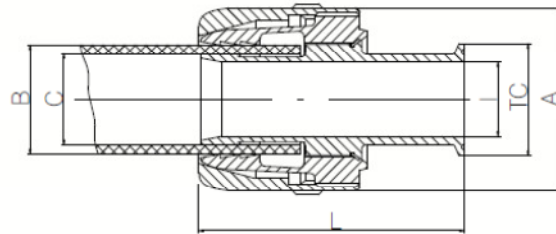
Specifications:
Material:
Contact parts: AISI 316L
Non contact parts: Sleeve: AISI 304
                Collet: PVDF(Autoclavable)
*Not suitable for silicone wire braided hose.

Ordering Information:

Part#	Size (mm)	A (mm)	B (mm)	C (mm)	TC (mm)	ID (mm)	L (mm)
153-000-001	¾"	48	27-29	19.1	25	15.8	64
153-000-002	1"	54	33.2-36	25.4	50.5	22.1	60
153-000-003	1 1/2"	70	46-49.5	38.1	50.5	34.8	64
153-000-004	2"	88	59-63	50.8	64	47.5	95
153-000-005	2 1/2"	116	71-74.5	63.5	77.5	60.2	100
153-000-006	3"	140	85-88	76.2	91	72.9	120

All dimensions are in mm. unless and otherwise specified.The information contained in this brochure is for guidance only. We reserve the right to modify any material or feature without notice in advance. For further information, please, consult our application specialist.

Filename: 153_Reusable_hose_connectors
Directory: C:\Users\user\Documents
Template:

                    C:\Users\user\AppData\Roaming\Microsoft\Templates\Normal.dot
    m
Title:
Subject:
Author: user
Keywords:
Comments:
Creation Date: 24-01-2014 22:51:00
Change Number: 21
Last Saved On: 30-01-2014 07:28:00
Last Saved By: user
Total Editing Time: 1,603 Minutes
Last Printed On: 04-07-2014 11:52:00
As of Last Complete Printing
    Number of Pages: 1
    Number of Words: 187 (approx.)
    Number of Characters: 1,071 (approx.)